

Motor starter SIRIUS 3RM1 DOL starter SAFETY 500 V; 0.4 - 2.0 A;  
24 V DC Screw connection system



Figure similar

General technical data	
Product brand name	SIRIUS
Product category	Motor starter
Product designation	Fail-safe direct starter
Design of the product	With electronic overload protection and safety-related disconnection
Trip class	CLASS 10A
Protection class IP	IP20
Suitability for operation Device connector 3ZY12	Yes
Product function Intrinsic device protection	Yes
Type of the motor protection	solid-state
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during transport	-40 ... +70 °C
• during storage	-40 ... +70 °C
Relative humidity during operation	10 ... 95 %

<b>Air pressure acc. to SN 31205</b>	900 ... 1 060 hPa
<b>Shock resistance</b>	6g / 11 ms
<b>Vibration resistance</b>	1 ... 6 Hz, 15 mm; 20 m/s <sup>2</sup> , 500 Hz
<b>Surge voltage resistance rated value</b>	6 kV
<b>Insulation voltage rated value</b>	500 V
<b>Mechanical service life (switching cycles) typical</b>	30 000 000
<b>Conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>• due to conductor-earth surge acc. to IEC 61000-4-5</li> </ul>	4 kV signal lines 2 kV
<ul style="list-style-type: none"> <li>• due to burst acc. to IEC 61000-4-4</li> </ul>	3 kV / 5 kHz
<ul style="list-style-type: none"> <li>• due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul>	10 V
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Field-bound HF-interference emission acc. to CISPR11</b>	Class B for the domestic, business and commercial environments
<b>Conducted HF-interference emissions acc. to CISPR11</b>	Class B for the domestic, business and commercial environments
<b>maximum permissible voltage for safe isolation</b>	
<ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> </ul>	500 V
<ul style="list-style-type: none"> <li>• between control and auxiliary circuit</li> </ul>	250 V
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	Q
<b>Reference code acc. to DIN EN 61346-2</b>	Q

#### Safety related data

<b>Safety Integrity Level (SIL) acc. to IEC 61508</b>	3
<b>Performance level (PL) acc. to EN ISO 13849-1</b>	e
<b>Category acc. to EN ISO 13849-1</b>	4
<b>Safety device type acc. to IEC 61508-2</b>	Type B
<b>Hardware fault tolerance acc. to IEC 61508</b>	1
<b>PFHD with high demand rate acc. to EN 62061</b>	0.00000002 1/h
<b>PFDAvg with low demand rate acc. to IEC 61508</b>	0.000018
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>Safe state</b>	Load circuit open
<b>Stop category acc. to DIN EN 60204-1</b>	0
<b>Safe failure fraction (SFF)</b>	99.4 %
<b>MTTFd</b>	75 y
<b>Average diagnostic coverage level (DCavg)</b>	99 %
<b>Function test interval maximum</b>	1 y
<b>Diagnostics test interval by internal test function maximum</b>	600 s

Failure rate [FIT] at rate of recognizable hazardous failures ( $\lambda_{dd}$ )	1 400 FIT
Failure rate [FIT] at rate of non-recognizable hazardous failures ( $\lambda_{du}$ )	16 FIT
Protection against electrical shock	finger-safe
Off-delay time with safety-related request when switched off via control inputs maximum	65 ms
Off-delay time with safety-related request when switched off via supply voltage maximum	120 ms

#### ATEX

Hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDAvg with low demand rate acc. to IEC 61508 relating to ATEX	0.0005
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.00000005 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL2
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y

#### Main circuit

Number of poles for main current circuit	3
Operating voltage rated value	48 ... 500 V
Relative symmetrical tolerance of the operating voltage	10 %
Operating frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
Relative symmetrical tolerance of the operating frequency	10 %
Operating current at AC-53a at 400 V at ambient temperature 40 °C rated value	2 A
Minimum load [%]	20 %
Power loss [W] typical	0.3 W
Adjustable pick-up value current of the current-dependent overload release	0.4 ... 2 A
Ampacity when starting maximum	16 A
Operating power for three-phase motors at 400 V at 50 Hz	0.09 ... 0.75 kW
Operating frequency maximum	1 1/s

#### Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage 1	
• at DC rated value	24 V

<b>Operating range factor control supply voltage rated value</b>	
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	0.8 ... 1.25
<b>Control current</b>	
<ul style="list-style-type: none"> <li>• at DC <ul style="list-style-type: none"> <li>— in standby mode</li> <li>— during operation</li> <li>— when switching on</li> </ul> </li> </ul>	13 mA 57 mA 150 mA
<b>Input voltage at digital input</b>	
<ul style="list-style-type: none"> <li>• for signal &lt;1&gt; <ul style="list-style-type: none"> <li>— at DC</li> </ul> </li> <li>• with signal &lt;0&gt; <ul style="list-style-type: none"> <li>— at DC</li> </ul> </li> </ul>	15 ... 30 V 0 ... 5 V
<b>Input current at digital input</b>	
<ul style="list-style-type: none"> <li>• for signal &lt;1&gt; <ul style="list-style-type: none"> <li>— at DC</li> </ul> </li> <li>• with signal &lt;0&gt; <ul style="list-style-type: none"> <li>— at DC</li> </ul> </li> </ul>	8 mA 1 mA
<b>Switch-on delay time</b>	90 ... 120 ms
<b>Off-delay time</b>	40 ... 55 ms

#### Auxiliary circuit

<b>Number of CO contacts for auxiliary contacts</b>	1
<b>Operating current of auxiliary contacts</b>	
<ul style="list-style-type: none"> <li>• at AC-15 at 230 V maximum</li> <li>• at DC-13 at 24 V maximum</li> </ul>	3 A 1 A

#### Installation/ mounting/ dimensions

<b>Mounting position</b>	vertical, horizontal, standing (observe derating)
<b>Mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	22.5 mm
<b>Height</b>	100 mm
<b>Depth</b>	141.6 mm

#### Connections/Terminals

<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>	screw-type terminals screw-type terminals
<b>Type of connectable conductor cross-sections for main contacts</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded</li> <li>— with core end processing</li> </ul>	1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> ) 1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 1,5 mm <sup>2</sup> )

Type of connectable conductor cross-sections at AWG conductors for main contacts	1x (20 ... 12), 2x (20 ... 14)
Type of connectable conductor cross-sections for auxiliary contacts	1x (0,5 ... 2,5 mm <sup>2</sup> ), 2x (1,0 ... 1,5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded <ul style="list-style-type: none"> <li>— with core end processing</li> </ul> </li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )
Type of connectable conductor cross-sections at AWG conductors for auxiliary contacts	1x (20 ... 14), 2x (18 ... 16)

### UL ratings

Full-load current (FLA) for three-phase AC motor at 480 V rated value	2 A
Yielded mechanical performance [hp]	
<ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> </ul> </li> </ul>	<p>0.125 hp</p> <p>0.333 hp</p> <p>0.333 hp</p> <p>0.75 hp</p>

### Certificates/approvals

General Product Approval	For use in hazardous locations	Functional Safety/Safety of Machinery
--------------------------	--------------------------------	---------------------------------------



[Type Examination](#)

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1102-1AA04>


**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1102-1AA04>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RM1102-1AA04>

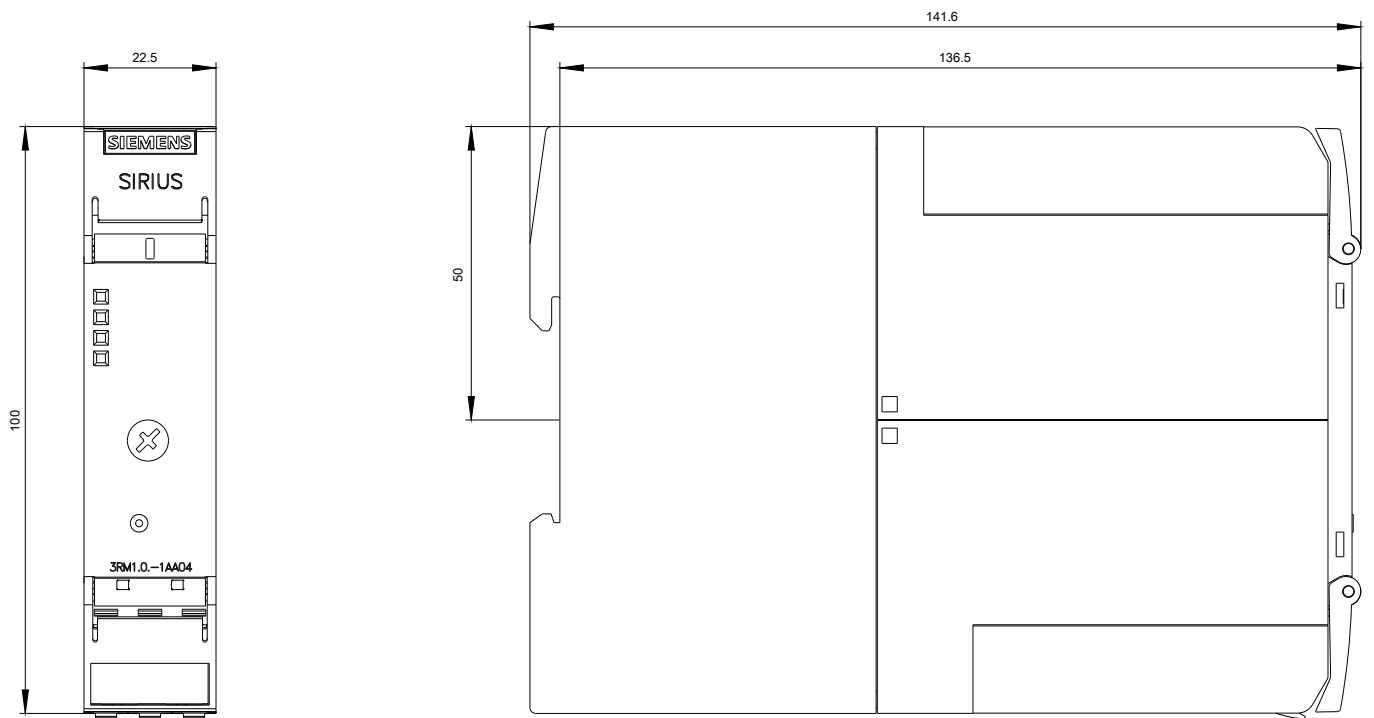

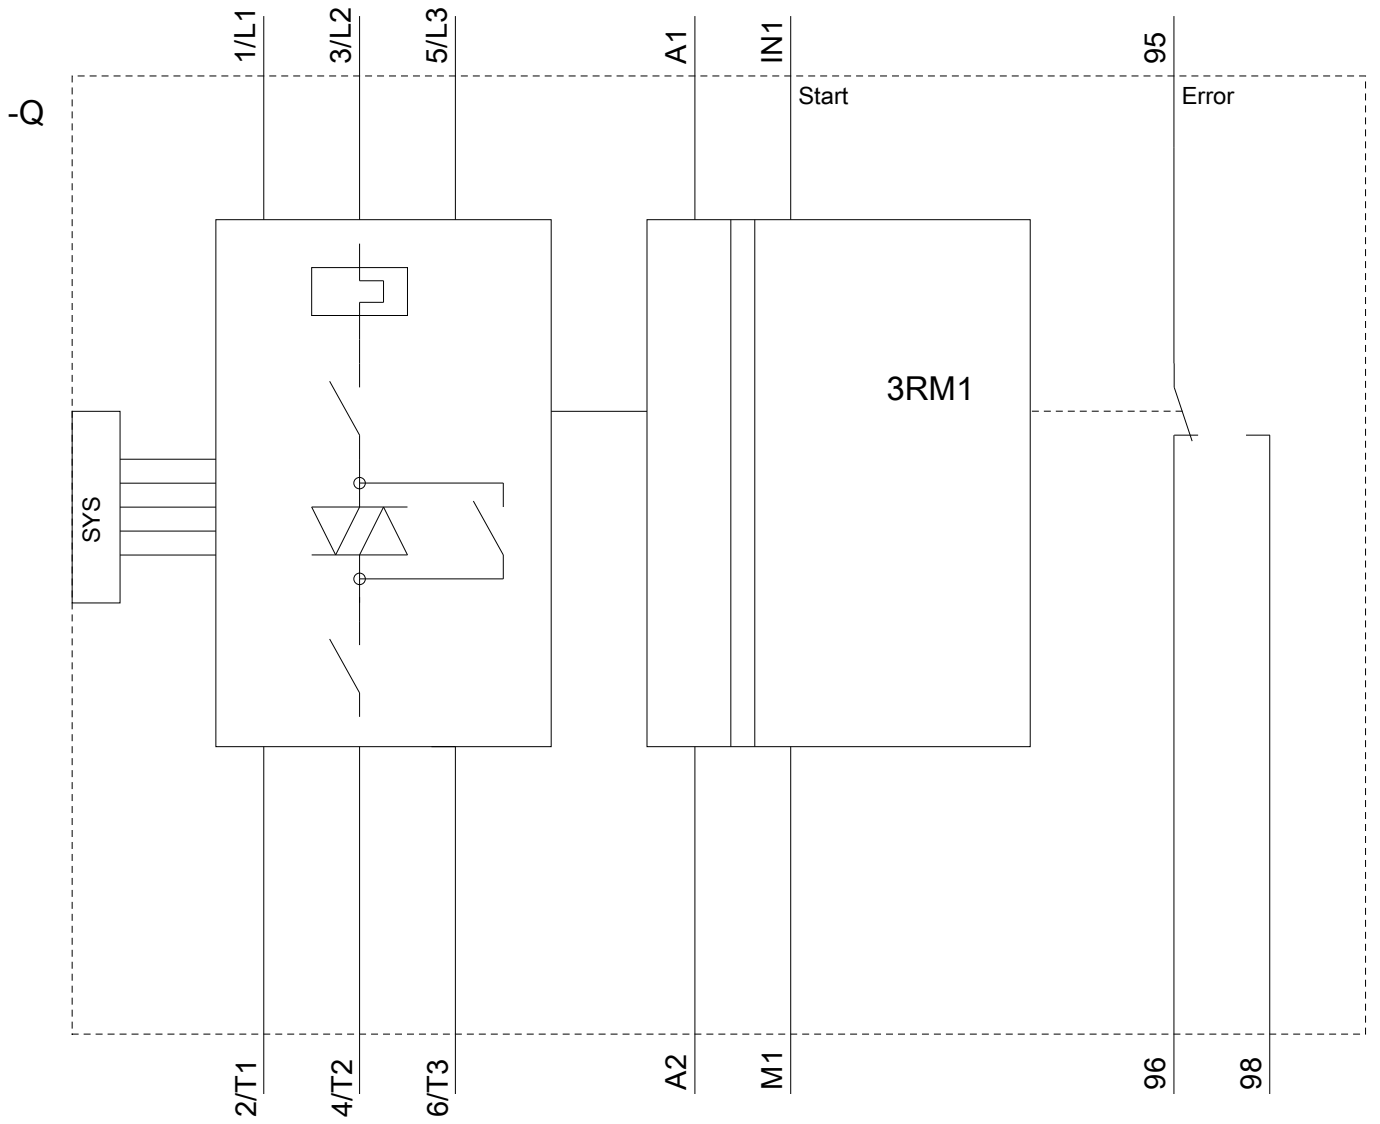

last modified:

06/28/2018